


RIP software installation and setup

▶ Copy RIP driver to computer from CD, install software to computer C drive →



▶ Insert the RIP dongle from the box into the computer, click the software icon to open the software



▶ RIP software setting

Rip software can use in Win7 32 bit, 64 bit and Windows XP computers. Can't use on Win10.

1、 language setting

Select the language as needed, close software, and restart it will become the language version which you set



1. Please close the computer anti-virus software before installation.
2. Rip software suitable for WIN7, XP system computer
3. Copy RIP driver to computer from CD, install software to computer C drive, Insert the RIP dongle into the computer, click the software icon to open the software.

Shandong Honzhan Decoration Engineering Co.,Ltd
Tel: 008618660396497
Fax: 008618660396497
E-mail: sales@honzhanmachines.com
Skype: live:sales_87776
www.honzhanmachines.com

RIP software installation and setup

Layout	
Paper Size	
Width	32.900
Height	60.000
Original Size	
Width	0.000
Height	0.000
Output Position	
X	0.000
Y	0.000
Output Size	
Width	0.000
Height	0.000
Scale	
Equal Proportion	TRUE
Copies	
Copies(White)	0
Copies(Color)	1
Repeat	
X	1
Y	1
Distribute	Spacing
X Spacing	0.000
Y Spacing	0.000
Pattern	Normal

Layout Printer Color White


Printer printable size (Paper Size: Width:32.000 Height: 60.000)

Original Size: no need to change

Output position: according to requirement


Output Size: Printing image size

UV printer note: X: 5.000 Y: 5.000
the UV lamp can illuminate
the entire picture.



T-shirt printers no
need to reserved
space.

Shandong Honzhan Decoration Engineering Co.,Ltd
Tel/WhatsApp/Viber: 008618660396497
Skype: live:sales_87776
E-mail: sales@honzhanmachines.com
www.honzhanmachines.com

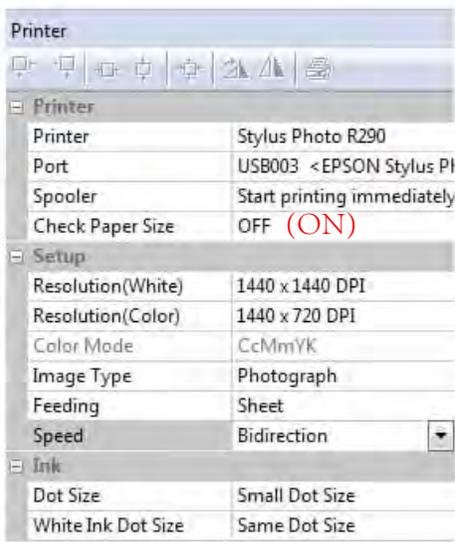

Printer: HZ-A3-6C Printer select: Stylus photo R290; HZ-A3-8C Printer select: Stylus photo R1800 /R1900


Port: HZ-A3-6C Printer select: EpsonR1400/R1390 ; HZ-A3-8C Printer select: Epson R1800/R1900

Check Paper Size: for control positioning, always choose: ON.


White ink and color ink match at the same position, the CMYK colors cover white ink.

Resolution: According to requirement, to select the print Resolution

Speed: Bidirection/unidirection. According to requirement. Always choose: Bidirection

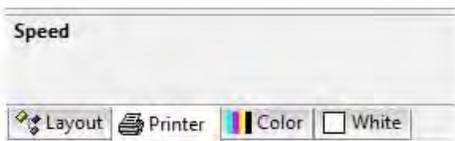

Shandong Honzhan Decoration Engineering Co.,Ltd
Tel/WhatsApp/Viber: 008618660396497
Skype: live:sales_87776
E-mail: sales@honzhanmachines.com
www.honzhanmachines.com

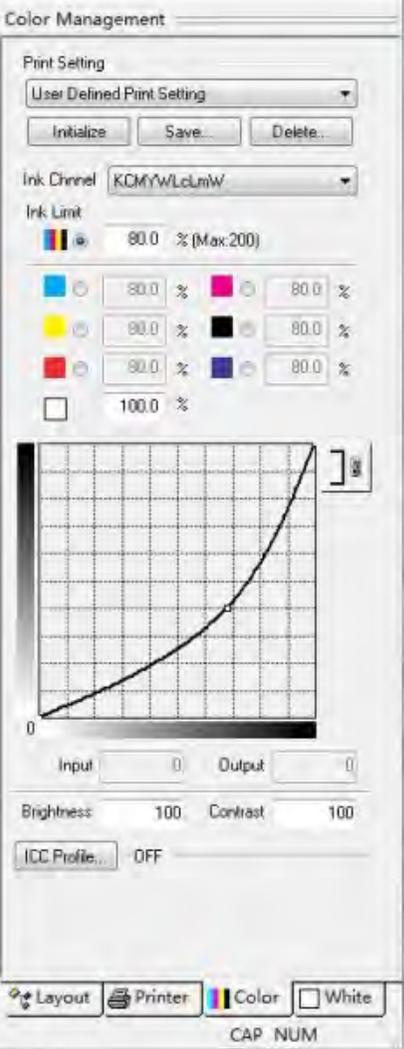

Ink Channel:

HZ-A3-6C printer: If not add white ink, choose YKLCLMMC, if add white ink, choose YKWWMC.

HZ-A3-8C printer: If not add white ink, choose YKLCLMMC, if add white ink, choose: WWWWKCMY

Ink Limit: According to requirement.

White: 100% or 120%, HZ-A3-6C printer print white ink, if customers think not white enough, can print two times white ink, then print color inks.


HZ-A3-8C printer usually no need to print two times white ink. unless need to.

Adjusting the ink ejection volume, different materials have different amounts of ink ejection.


Adjust the ink jet color volume, Do not pull this curve

ICC Profile: according to customers' requirement. Can use ink ICC curve for better color reproduction

Shandong Honzhan Decoration Engineering Co.,Ltd
 Tel/WhatsApp/Viber: 008618660396497
 Skype: live:sales_87776
 E-mail: sales@honzhanmachines.com
 www.honzhanmachines.com

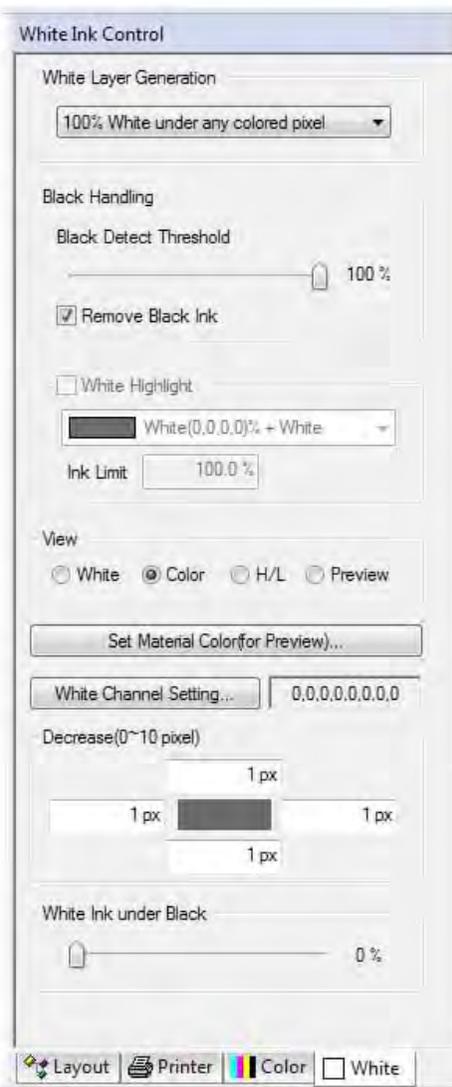


Can not choose this. According to requirement.

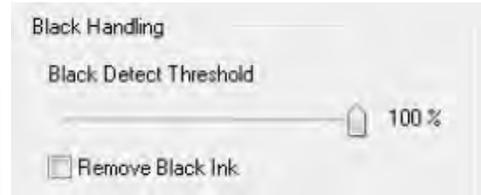


White border is missing when printing on white, white ink can be shrunk here.

White Ink Control:
White Layer Generation: has 5 below models:

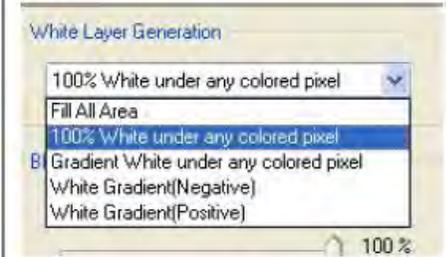

1. For all area: The printed image cover with 100% white ink
2. 100% White: Printed image which has color which place has white ink, no color no white ink.
3. Gradient White Under any Colored Pixel: can print base on image color depth level print white inks.
4. White Gradient(Negative): Print white ink on image which place has no color, has color place don't print white ink. Will appear hollow effect.
5. White Gradient(Positive): Not print white ink where picture has white place, image color place can print white ink.

Shandong Honzhan Decoration Engineering Co.,Ltd
 Tel/WhatsApp/Viber: 008618660396497
 Skype: live:sales_87776
 E-mail: sales@honzhanmachines.com
 www.honzhanmachines.com

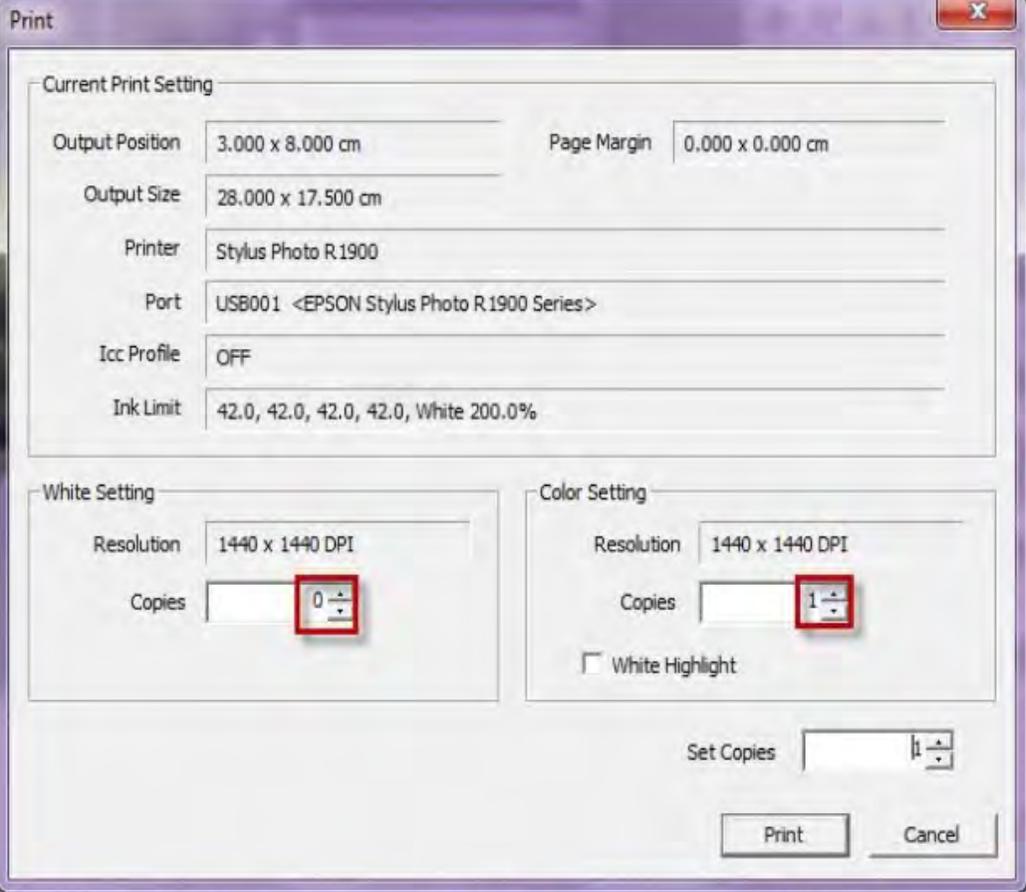

Please note: one time only can print one task. Otherwise this error will occur.

Error name: When printer printing, "INK" and "JAM" flash simultaneously. Please check page 54.

This error can be avoided.

Print white ink 0 Print color ink 1 → At this time will print color ink

Print white ink 1 Print color ink 0 → At this time will print white ink

**Note: 1, printing times can only be 0 or 1
2, white ink and color ink can not be 1 at the same time**

Shandong Honzhan Decoration Engineering Co.,Ltd
 Tel/WhatsApp/Viber: 008618660396497
 Skype: live:sales_87776
 E-mail: sales@honzhanmachines.com
 www.honzhanmachines.com